



PUFFIN ACADEMY

MDM Guide


Manage App Configurations



STEP 1

Get APP_ID from URL bar in Puffin Academy.

Please use your desktop browser to visit <http://www.flashbrowser.com>, and try to reach your own web app page. In the URL bar, you should find “**product_id=**” followed by your App ID (Similar to the screenshot below).

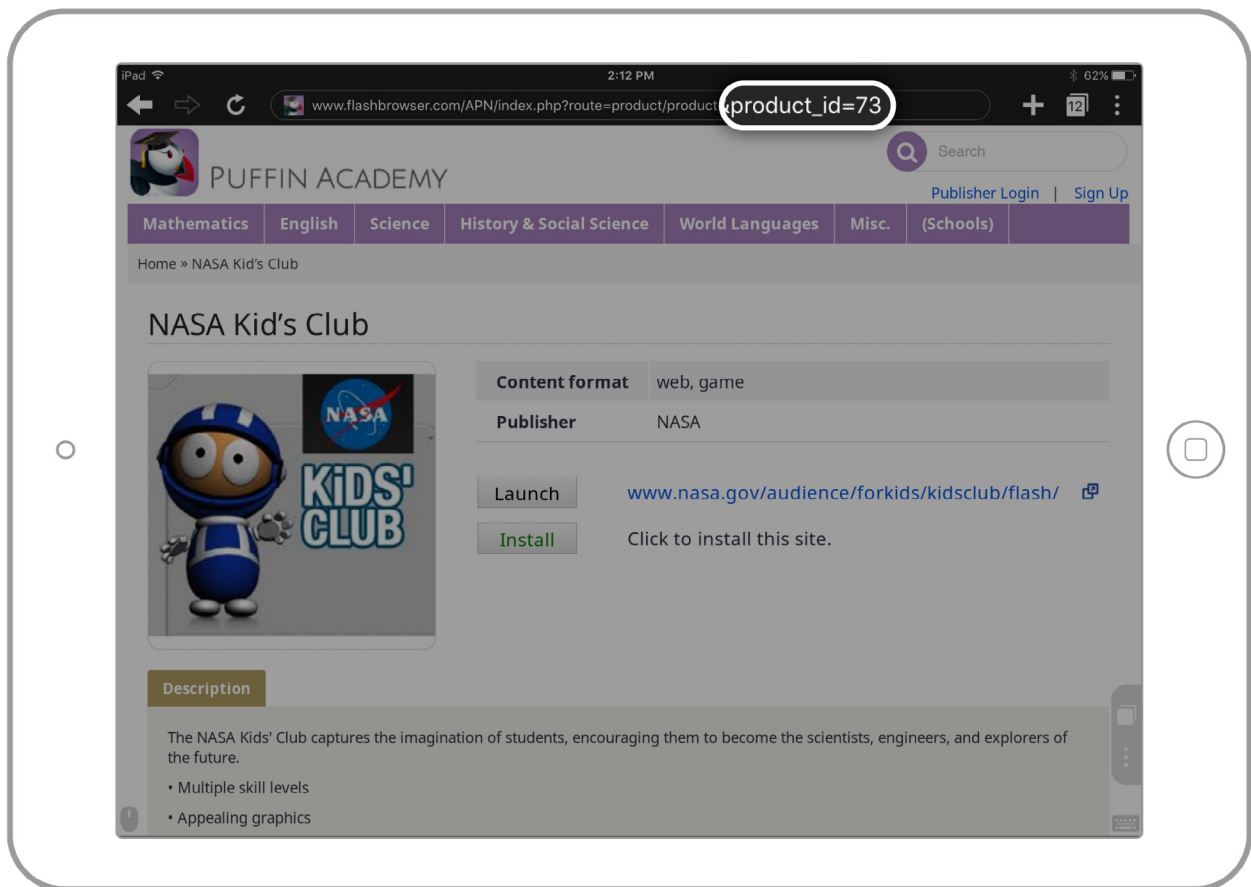



STEP 2

Create and manage preloaded apps list.

1. Copy the template below.

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plist PUBLIC "-//Apple//DTD PLIST 1.0//EN" "http://www.apple.
com/DTDs/PropertyList-1.0.dtd">
<plist version="1.0">
<dict>
  <key>installApps</key>
  <array>
    <string>{APP_ID}</string>
    <string>{APP_ID}</string>
  </array>
</dict>
</plist>
```

2. In the **string** filed, replace **{APP_ID}** with your APP ID number retrieved in first step.
3. Save this pre-installed apps list file with **.plist** file extension



STEP 3

Send apps list into specified device groups through MDM service.

1. Click **load the contents of a file** and **choose the apps list file**.
2. Click **Send Configuration**

Please note that your MDM administration console could be different than the screenshot below. If so, please contact your MDM system provider for further support.

The screenshot shows the Puffin Academy MDM console interface. At the top left, it says "Puffin Academy" and "STATUS Managed". On the top right, there is a red "Delete App" button. The main section is titled "Managed App Configuration" and contains a text area with a "load the contents of a file" button. Below the text area is a code editor containing XML configuration for installing two apps. At the bottom, there are "Fetch Configuration" and "Send Configuration" buttons.

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plist PUBLIC "-//Apple//DTD PLIST 1.0//EN" "http://www.apple.com/DTDs/PropertyList-1.0.dtd">
<plist version="1.0">
<dict>
  <key>installApps</key>
  <array>
    <string>352</string>
    <string>1246</string>
  </array>
</dict>
</plist>
```



STEP 4

Verify on your Puffin Academy app.

Launch Puffin Academy, you should find those apps have been properly pre-loaded (and non-removable) on the start page.





UPDATE SETTINGS

To replace/remove the current settings.

1. To overwrite current apps list, please pack and send a new apps list.
2. To remove all preloaded apps, please send an empty app list in the following format.

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plist PUBLIC "-//Apple//DTD PLIST 1.0//EN" "http://www.apple.
com/DTDs/PropertyList-1.0.dtd">
<plist version="1.0">
<dict>
  <key>installApps</key>
  <array/>
</dict>
</plist>
```